
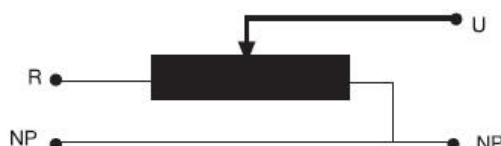
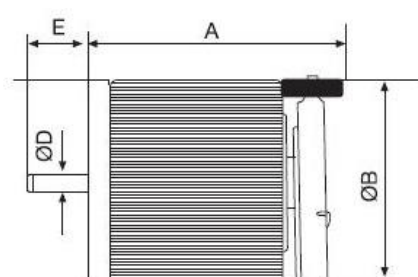




SINGLE PHASE VARIABLE AUTOTRANSFORMER VARF-1N RANGE

single phase, open type, panel mounting
input: 230V AC 50/60Hz **output:** 0-250Vac
CENTER TAP 125V (available on request)



TYPE	Current A	MAX VA	A	Ø B	C	Ø D	E	weight KG
VAR02F-1N	2	500	140	110	40	10	30	5
VAR04F-1N	4	1.000	150	155	50	10	30	8
VAR06F-1N	6	1.500	155	185	50	10	30	11
VAR08F-1N	8	2.000	155	186	50	10	30	12
VAR10F-1N	10	2.500	160	190	50	10	30	15

KNOB AND DIAL SUPPLIED AS OPTION

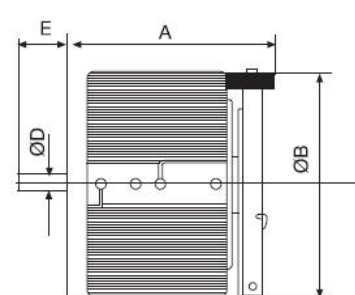

TYPE	Current A	MAX VA	A	Ø B	C	Ø D	E	F	G	weight KG
VAR14F-1N	14	3.500	160	190	84	10	30	116	M6	18
VAR18F-1N	18	4.500	170	200	84	10	30	116	M6	22
VAR20F-1N	20	5.000	170	200	84	10	30	116	M6	23

KNOB AND DIAL SUPPLIED AS OPTION

Dimensions and weight may be subject to a change without notice

K-FACTOR SRL unipersonale - Via Giotto 9 - 42014 Castellarano (RE) - Italy - VAT# IT 02422010369

R.E.A. of Reggio Emilia: n. 286968 - Company registration number of RE: 02422010369

Tel +39-0536261380 - e-mail: info@kfactor.it - <http://www.kfactor.it/en>



SINGLE PHASE VARIABLE AUTOTRANSFORMER VARF-1N RANGE

single phase, open type, floor mounting

input: 230V AC 50/60Hz

output: 0-250Vac

CENTER TAP 125V (available on request)

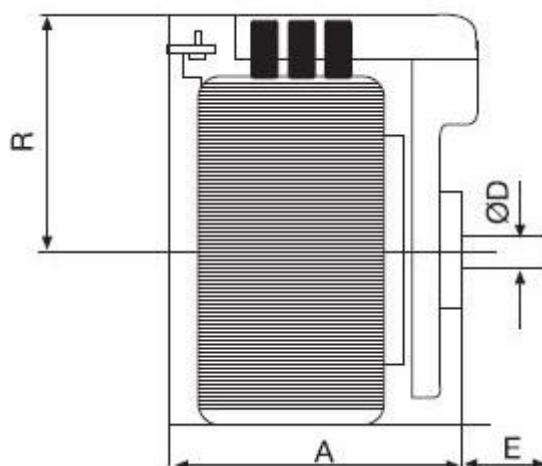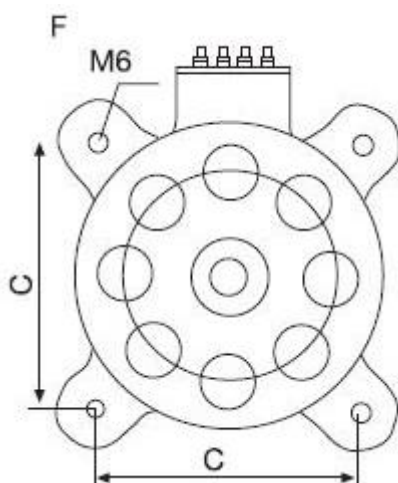

TYPE	Current A	MAX VA	A	C	ØD	E	R	F	weight KG
VAR26F-1N	26	6.500	200	235	15	80	200	M6	35
VAR30F-1N	30	7.500	200	235	15	80	220	M6	39
VAR40F-1N	40	10.000	220	250	15	80	220	M6	47
VAR50F-1N	50	12.500	230	305	15	80	240	M6	64
VAR60F-1N	60	15.000	245	305	15	80	240	M6	72

KNOB AND DIAL SUPPLIED AS OPTION

Dimensions and weight may be subject to a change without notice

K-FACTOR SRL unipersonale - Via Giotto 9 - 42014 Castellarano (RE) - Italy - VAT# IT 02422010369

R.E.A. of Reggio Emilia: n. 286968 - Company registration number of RE: 02422010369

Tel +39-0536261380 - e-mail: info@kfactor.it - <http://www.kfactor.it/en>




THREE PHASE VARIABLE AUTOTRANSFORMER VARF-3N RANGE

three phase, open type, floor mounting

input: 400V AC 50/60Hz

output: 0-435Vac

CENTER TAP 125V F-N (available on request)

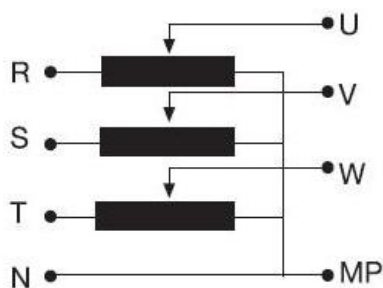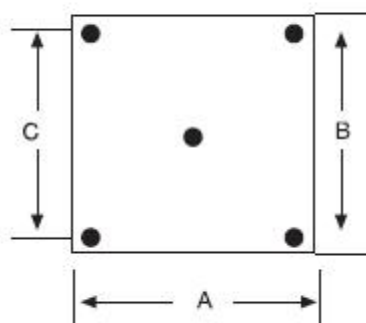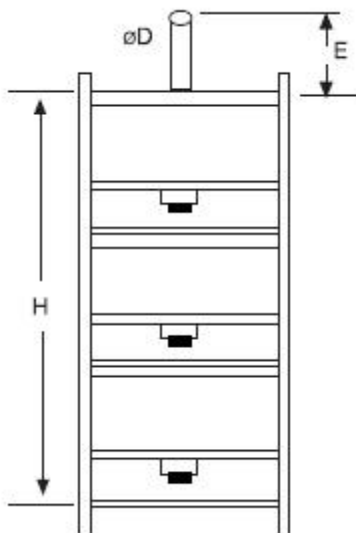

TYPE	Current A	MAX kVA	A	B	H	Ø D	E	weight KG
VAR04F-3N	4	3.0	180	160	520	10	100	28
VAR06F-3N	6	4.5	180	160	520	10	100	37
VAR08F-3N	8	6.0	180	160	520	10	100	38
VAR10F-3N	10	7.5	180	160	520	10	100	46
VAR14F-3N	14	10.5	220	190	560	10	100	57
VAR18F-3N	18	13.5	220	190	560	10	100	70
VAR20F-3N	20	15	220	190	560	10	100	73

KNOB AND DIAL SUPPLIED AS OPTION

Dimensions and weight may be subject to a change without notice

K-FACTOR SRL unipersonale - Via Giotto 9 - 42014 Castellarano (RE) - Italy - VAT# IT 02422010369

R.E.A. of Reggio Emilia: n. 286968 – Company registration number of RE: 02422010369

Tel +39-0536261380 – e-mail: info@kfactor.it - <http://www.kfactor.it/en>



THREE PHASE VARIABLE AUTOTRANSFORMER VARF-3N RANGE

three phase, open type, floor mounting

input: 400V AC 50/60Hz

output: 0-435Vac

CENTER TAP 125V F-N (available on request)

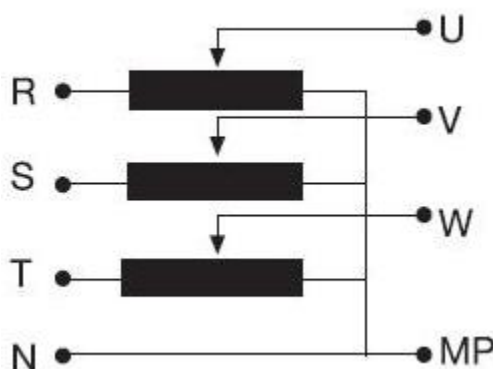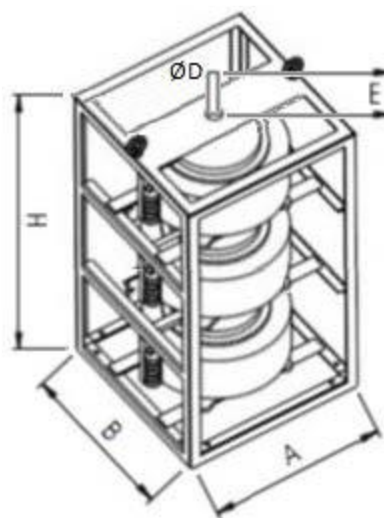

TYPE	Current A	MAX VA	A	B	H	ØD	E	weight KG
VAR26F-3N	26	19.500	420	420	820	15	150	119
VAR30F-3N	30	23.500	420	420	820	15	150	131
VAR40F-3N	40	30.000	420	420	820	15	150	155
VAR50F-3N	50	37.500	480	480	820	15	150	207
VAR60F-3N	60	45.000	480	480	880	15	150	228

KNOB AND DIAL SUPPLIED AS OPTION

Dimensions and weight may be subject to a change without notice

K-FACTOR SRL unipersonale - Via Giotto 9 - 42014 Castellarano (RE) - Italy - VAT# IT 02422010369

R.E.A. of Reggio Emilia: n. 286968 - Company registration number of RE: 02422010369

Tel +39-0536261380 - e-mail: info@kfactor.it - <http://www.kfactor.it/en>